

# NARVA®

## SPECIFICATIONS EX2 10" SINGLE ROW LED LIGHT BAR 72830



**284**  
METRES

@ 1 LUX



CUSTOM  
TRIMS



HARNESS  
FREE





YEAR  
WARRANTY

### DESCRIPTION

EX2's hybrid beam provides outstanding width and distance, without dark spots or hot spots, ensuring exceptional clarity in the dark. Revolutionary internal switching (patent pending) means no harness is required. A relay will be required for negatively switched vehicles. Making for the easiest wiring on the market and eliminating the need to wire these components through the firewall. Check local laws for your state. EX2's are built to last; sealed to IP68 & IP69K, with hard-coated polycarbonate lens, composite mounting brackets, stainless steel mounting hardware and a 7 year warranty.

Raw Lumens	2720Lm
Effective Lumens	2235Lm
Beam Distance	284m @ 1lux
Beam Width	34m @ 1lux
Colour Temperature	5700K ±5%
Colour Rendering Index (CRI)	70
Height	71
Depth	63.5
Width	268
Weight	884g ±10%
Cable	0.5m
Housing	Pressure die-cast aluminium
Lens Material	Hard coated polycarbonate
Lens Protector	Black ABS
Bracket	Nylon + 30% Glass-Filled
Input Voltage	9-33V DC
Current Raw (@13.5V/@28V) Per Lamp	1.93/0.99

LED's	8
LED Spec	5W CREE LED
Protection	Reverse Polarity Protection, Over and Under Voltage Protection
IP Rating	IP68 & IP69K
Operating Temperature	-40 - +60°
ECE R10	✓
RCM	✓
Warranty	7 Years
Wiring	Red - Positive Yellow - High Beam Trigger Black - Negative
Country of Origin	China
Kit Includes	1 x 10" Single Row Light Bar 1 x Black Lens Protector 2 x Colour Trims (Electric Blue - fitted on lamp/ Slate Grey - in box) 1 x Wiring Pigtail Lead Product Instructions S/S Hardware

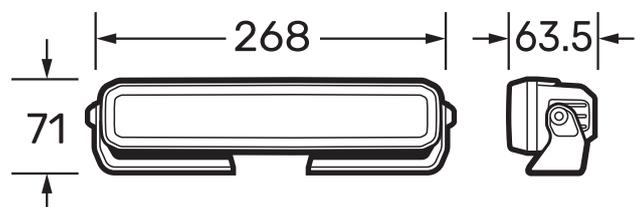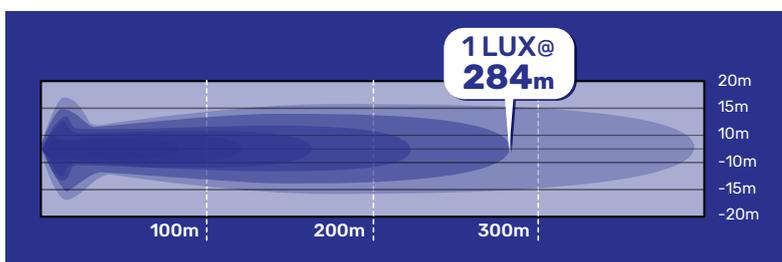

Brown & Watson International

1500 Ferntree Gully Road, Knoxfield, 3180 | P. 1800 422 422