


NARVA®

INSTRUCTION SHEET

P/No. 85203A, 85203R, 85203B, 85203W

SELF CONTAINED L.E.D WARNING LIGHTS

SURFACE MOUNT

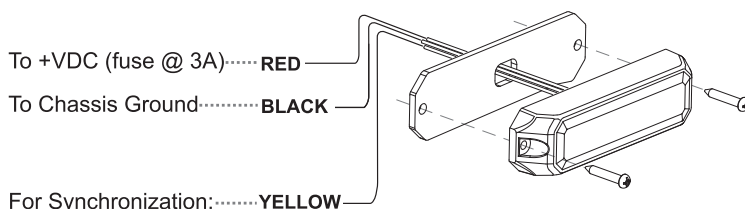

For Synchronization:.....**YELLOW**

Connect **YELLOW** wires of all heads together for synchronization
(all heads must be set at the same pattern)

For Simultaneous or Alternating Flash:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthouse will display short (single or double) flashes:
 - Single flash = Group1
 - Double flash = Group2
2. Remove **YELLOW** wire from +VDC and momentarily apply to +VDC to change Groups:
 - Heads in the same Group flash together.
 - Group1 Heads alternate with Group2 Heads.

For Flash Patterns:

Momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quickly three times for pattern 0

NOTE: This unit may not be factory set at pattern 0.

Flash Patterns			
0	Random	6	Quad
1	Steady	7	Quint
2	Single	8	8 Flash
3	Mega	9	Single-Quad
4	Double	10	Single H/L
5	Triple	11	Single-Triple-Quint

FOR NIGHT OPERATION (Dim mode):

Apply +VDC to **YELLOW** wire, after 3 seconds the unit will Dim.

The unit will return to full brightness once power is removed from the **YELLOW** wire.

* **Note:** Care should be taken to ensure Dim mode is engaged for longer than 3 seconds to avoid accidental pattern changes.