


NARVA®

INSTRUCTION SHEET

P/No. 85206A, 85206R, 85206B, 85206RB, 85206W

SELF CONTAINED L.E.D WARNING LIGHTS

SURFACE MOUNT

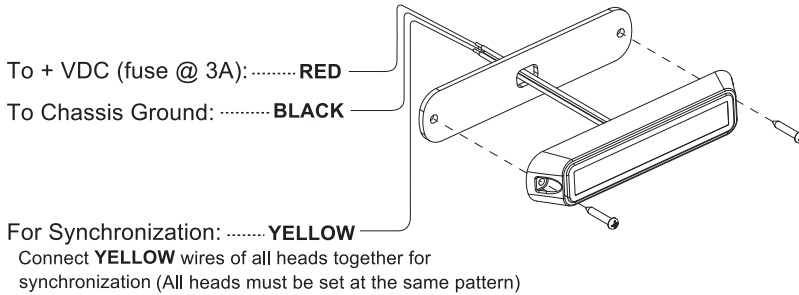

For Simultaneous or Alternating Flash:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthouse will display short (single or double) flashes:
 - Single flash = Group1
 - Double flash = Group2
2. Remove **YELLOW** wire from +VDC and momentarily apply to +VDC to change Groups:
 - Heads in the same Group flash together.
 - Group1 Heads alternate with Group2 Heads.

For Flash Pattern, momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quickly three times for reset (see flash pattern chart)

Flash Patterns

1	Single (2Hz)	13	Single H/L (split)
2	Double (2Hz)	14	Single (all)
3	Triple (2Hz)	15	Double (all)
4	Quad (2Hz)	16	Quad (all)
5	Random	17	Quint (all)
6	Single (split)	18	Mega (all)
7	Double (split)	19	Ultra (all)
8	Quad (split)	20	Single-Quad (all)
9	Quint (split)	21	Single H/L (all)
10	Mega (split)	22	Steady 2 (california)
11	Ultra (split)	23	Steady 4 (all)
12	Single-Quad (split)		

FOR NIGHT OPERATION (Dim mode):

Apply +VDC to **WHITE** wire, after 3 seconds the unit will Dim.

The unit will return to full brightness once power is removed from the **WHITE** wire.