

### ULTIMA 8 INCH LIGHT BAR 71710BK & 71715BK



CONNECT+



CUSTOM TRIMS



IP68  
IP69K




10  
YEAR WARRANTY

#### DESCRIPTION

The 8 inch Ultima Light Bar has a market-leading beam pattern that combines beam distance and width with smooth and easy driving. The Ultima Light Bars are engineered to endure heavy-duty conditions, with high ingress protection, improved cooling, and corrosion-resistant and rust-proof brackets. The polycarbonate lens and lens protector are also UV-resistant and protect against stone chips, which allows for a 10 year warranty. The Ultima light bar is customizable with different bezel colors and trims.

#### FEATURES AND BENEFITS

- Combination beam
- Uniform beam with no hot spots or dark spots
- Pressure die-cast aluminium housing
- Highest possible ingress protection (IP68 & IP69K)
- Virtually unbreakable polycarbonate lens
- Integrated DT connector with patch harness included
- Interchangeable colour trims

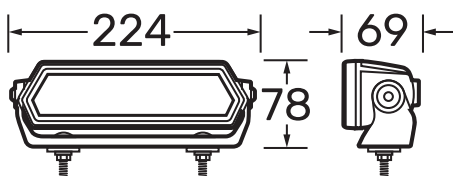

#### 8 INCH LONG & WIDE HYBRID BEAM P/No.71710BK

<b>Input Voltage Range</b>	10-33V DC
<b>Current Draw (@12V)</b>	9A/10.5A boost
<b>LED Power (Wattage)</b>	125W/140W (boost)
<b>Beam Width</b>	50m
<b>Distance at 1 Lux (Pair)</b>	700m @ 1lux
<b>Lumens (Pair)</b>	12,680Lm / 14,700Lm (boost)
<b>LED Qty</b>	15
<b>Operating Temperature</b>	-40°C to +60°C
<b>Colour Temperature</b>	5700°K ±5%
<b>Weight</b>	800g ±10%

#### 8 INCH ULTRA WIDE FLOOD HYBRID BEAM P/No. 71715BK

<b>Input Voltage Range</b>	10-33V DC
<b>Current Draw (@12V)</b>	9A/10.5A boost
<b>LED Power (Wattage)</b>	125W/140W (boost)
<b>Beam Width</b>	50m
<b>Distance at 1 Lux (Pair)</b>	700m @ 1lux
<b>Lumens (Pair)</b>	12,680Lm / 14,700Lm (boost)
<b>LED Qty</b>	15
<b>Operating Temperature</b>	-40°C to +60°C
<b>Colour Temperature</b>	5700°K ±5%
<b>Weight</b>	800g ±10%