

WARNING



Read carefully and understand all instructions before operating.

- It is not recommended to use magnetically mounted warning devices on the outside of a vehicle in motion. Usage is at the sole risk and responsibility of the user
- Risk of electrical shock; do not use in an environment with gas, combustible or explosive materials, or hot objects
- Do not open, repair or modify
- Use only under the recommended voltage and frequency requirements
- Do not look directly at the light, as this will result in dazzling
- Minimum distance from lighted objects 0.1m
- The specification in this manual is based on standard lab testing, different environment may influence the data

WARRANTY STATEMENT

Applicable only to product sold in Australia

Brown & Watson International Pty Ltd of 1500 Ferntree Gully Road, Knoxfield, Vic., telephone (03) 9730 6000, fax (03) 9730 6050, warrants that all products described in its current catalogue (save and except for all bulbs and lenses whether made of glass or some other substance) will under normal use and service be free of failures in material and workmanship for a period of one (1) year (unless this period has been extended as indicated elsewhere) from the date of the original purchase by the consumer as marked on the invoice. This warranty does not cover ordinary wear and tear, abuse, alteration of products or damage caused by the consumer.

To make a warranty claim the consumer must deliver the product at their cost to the original place of purchase or to any other place which may be nominated by either BWI or the retailer from where the product was bought in order that a warranty assessment may be performed. The consumer must also deliver the original invoice evidencing the date and place of purchase together with an explanation in writing as to the nature of the claim.

In the event that the claim is determined to be for a minor failure of the product then BWI reserves the right to repair or replace it at its discretion. In the event that a major failure is determined the consumer will be entitled to a replacement or a refund as well as compensation for any other reasonably foreseeable loss or damage.

This warranty is in addition to any other rights or remedies that the consumer may have under State or Federal legislation.

IMPORTANT NOTE

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Distributed by:

Brown & Watson Int. Pty. Ltd.

Knoxfield, Victoria 3180

www.narva.com.au

IS426 Issue 1: 18.04.19

NARVA®

AEROMAX L.E.D Rotating Beacon Class 1, 12/24V

User Manual & Product Instructions

P/No. 85470A, 85470R, 85470B, 85472A, 85472R, 85472B



FEATURES


- 6 High Intensity LED's
- SAE class 1 approved
- Engineered rotating reflector
- Made to last with unbreakable polycarbonate lens and aluminium base
- Available in flange or magnetic base
- CISPR Class 2 rated



INSTALLATION - FLANGE BASE


P/No. 85470A, 85470R, 85470B

1. Mark wire access and mounting holes on the mounting surface by using the mounting pad.
2. Drill the mounting holes accordingly.
3. Drill the wire access holes, deburr and feed the wire through.
4. Make and test all necessary connection.
5. Secure beacon onto mounting surface with mounting bolts.

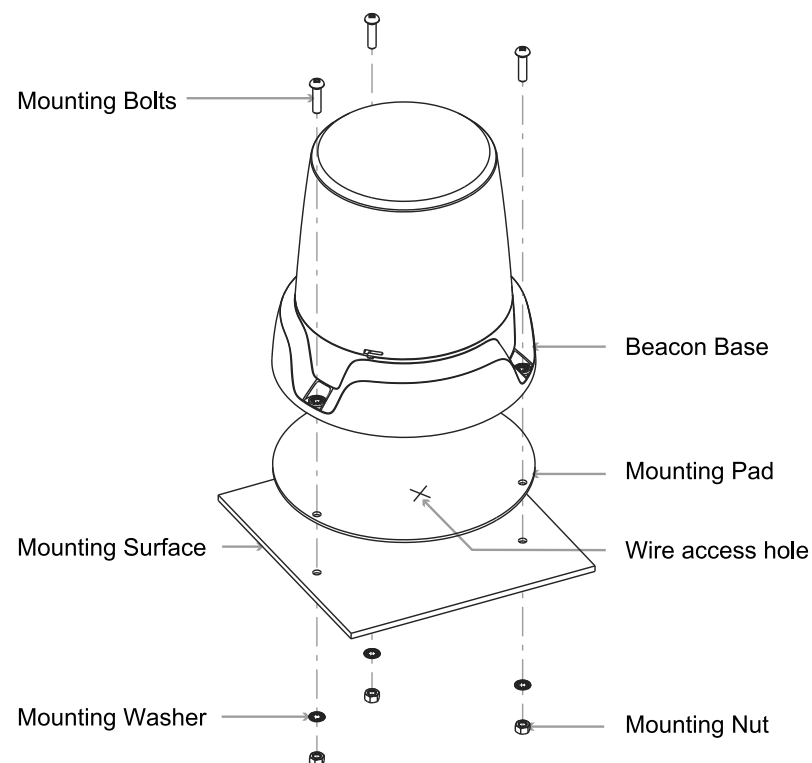


INSTALLATION - VACUUM MAGNETIC BASE

P/No. 85472A, 85472R, 85472B

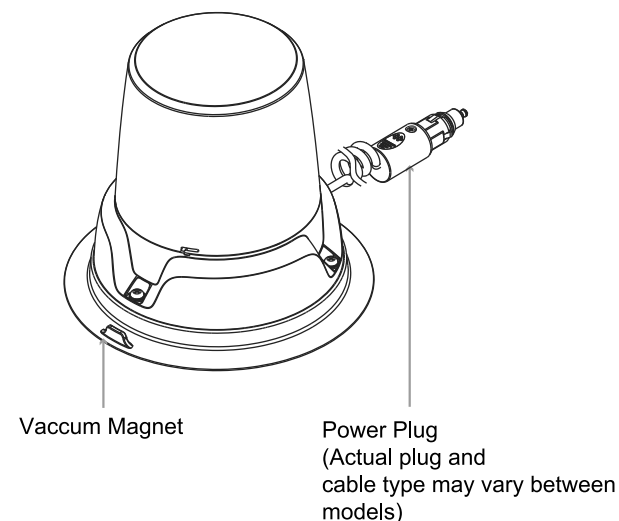

Dual Purpose Cigar Plug (for applicable models only):

When using models with dual purpose cigar plug, change the plug according to your actual socket by pushing in or out the red plastic frame.

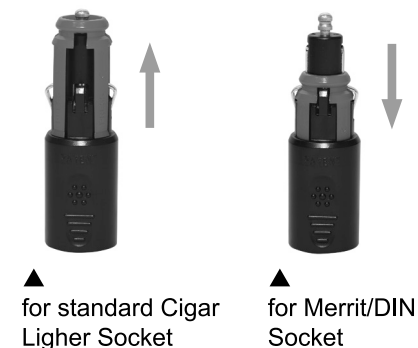

WIRING

RED	To 12/24VDC (+) (fuse rating = 2A at 12/24VDC)
BLACK	To chassis ground (-)
FLASH PATTERN	Anti-clockwise rotator (125RPM)